




Hydraumatec Engineering
Business Park of Camagnon
PO Box 40125
56804 Ploërmel
FRANCE
tel: +33 2 97 93 41 59
fax: +33 2 97 93 47 31
www.hydraumatec.com



CHOICE OF MANIFOLD BLOCKS

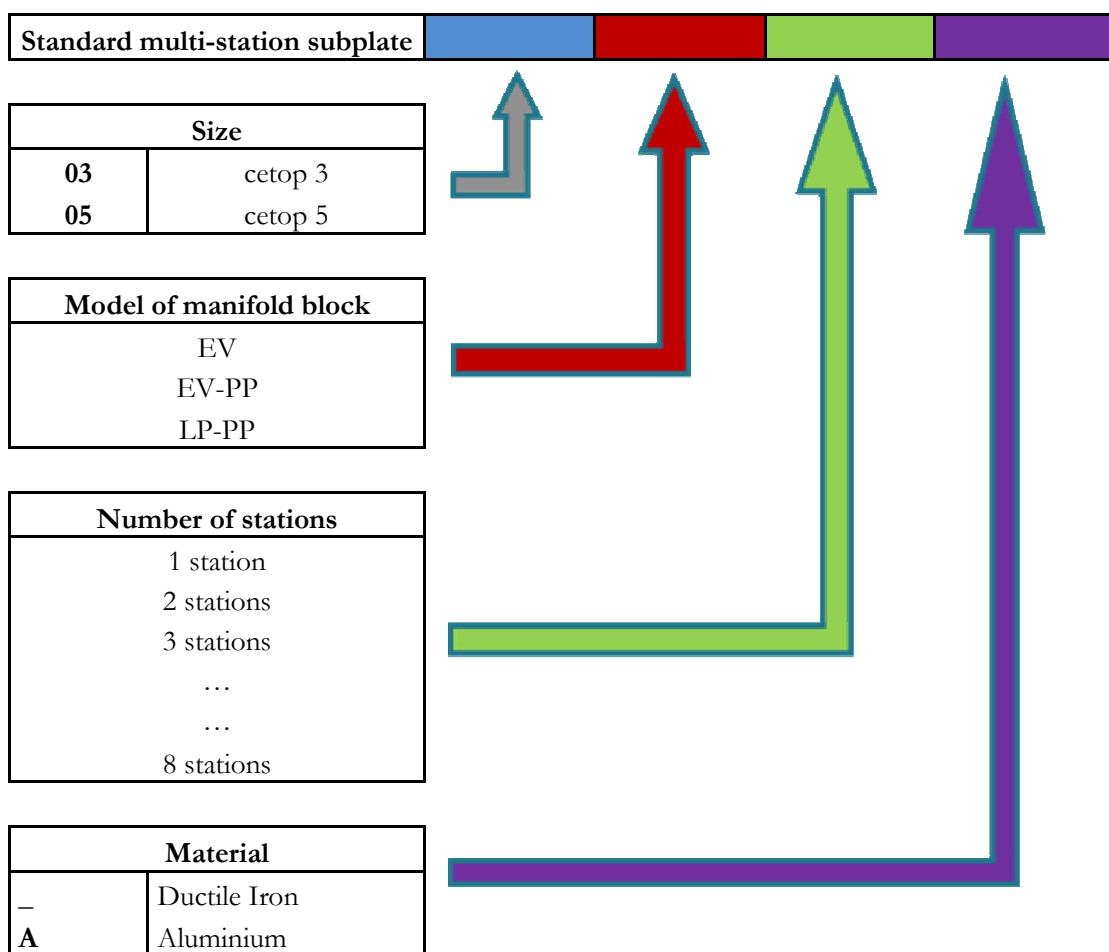


Options: different kind of materials by request, blocks up to twelve subplates.



MANIFOLD BLOCK CETOP 3 WITH A PRESSURE RELIEF VALVE AND PRESSURE TEST POINTS

BFMS 3 PRV PTP

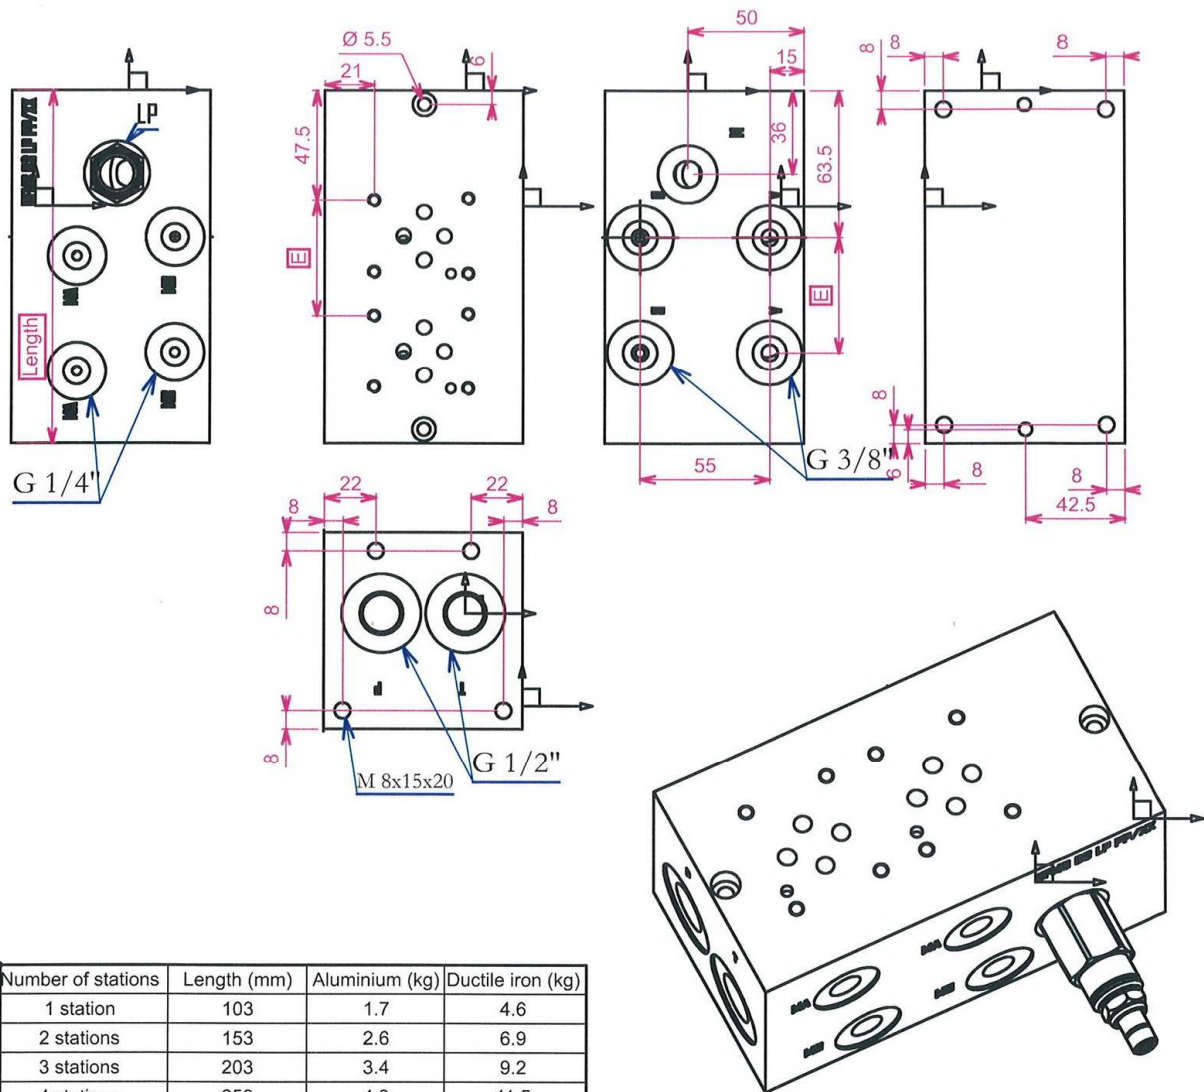

Number of stations	Length (mm)	Aluminium (kg)	Ductile iron (kg)
1 station	103	1.7	4.6
2 stations	153	2.6	6.9
3 stations	203	3.4	9.2
4 stations	253	4.3	11.5
5 stations	303	5.2	13.9
6 stations	353	6.1	16.2
7 stations	403	6.9	18.5
8 stations	453	7.7	20.8

E Distance between stations = 50mm
 Pressure relief valve :
 Pressure adjustment 70/315 Bar
 Flow 95 l/min

Operating pressure

Ductile iron EN GJS 400 phosphated : 350 Bar
 Aluminium 2017: 210 Bar

*Vertical or horizontal
assembly at your discretion*

