




Hydraumatec Engineering  
Business Park of Camagnon  
PO Box 40125  
56804 Ploërmel  
FRANCE  
tel: +33 2 97 93 41 59  
fax: +33 2 97 93 47 31  
[www.hydraumatec.com](http://www.hydraumatec.com)



## CHOICE OF MANIFOLD BLOCKS

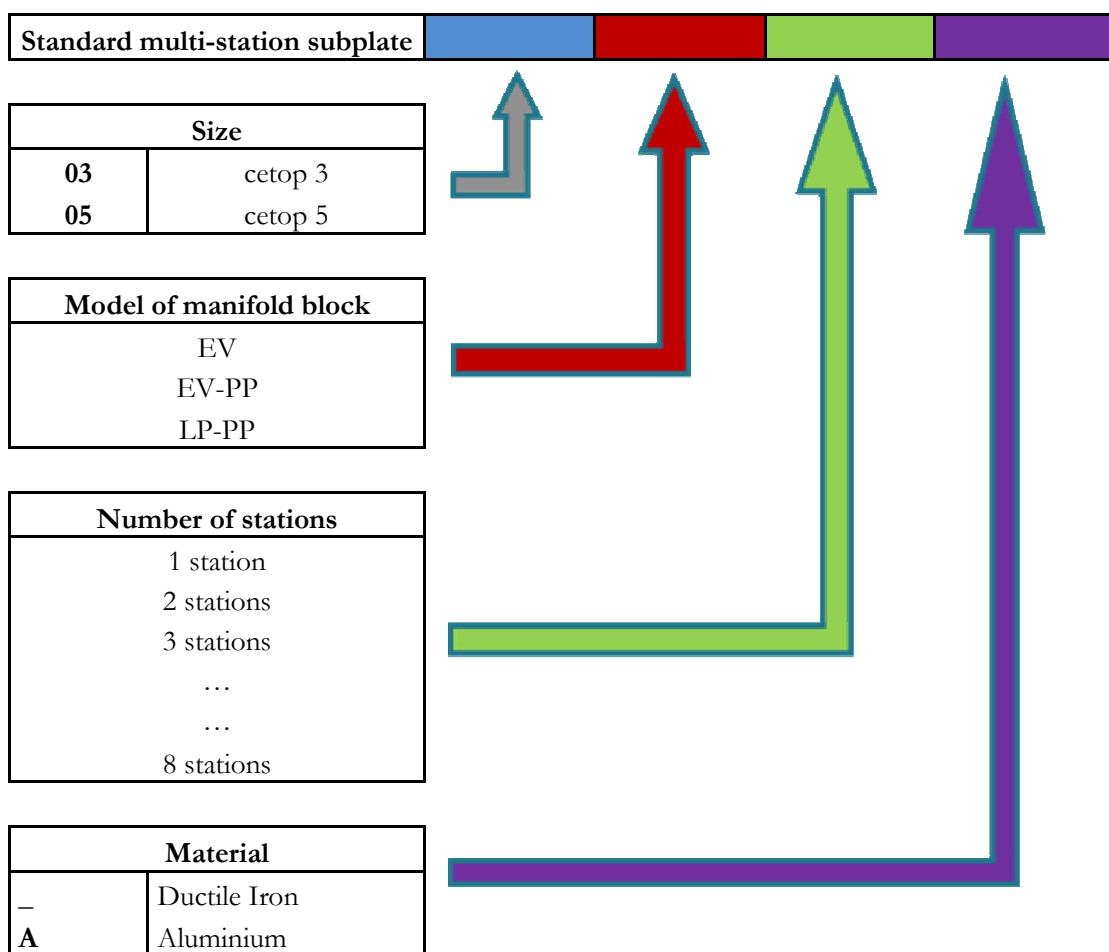


Options: different kind of materials by request, blocks up to twelve subplates.



# MANIFOLD BLOCK CETOP 5 WITH A SOLENOID DIRECTIONAL VALVE AND PRESSURE TEST POINTS

BFMS 5 SDV PTP

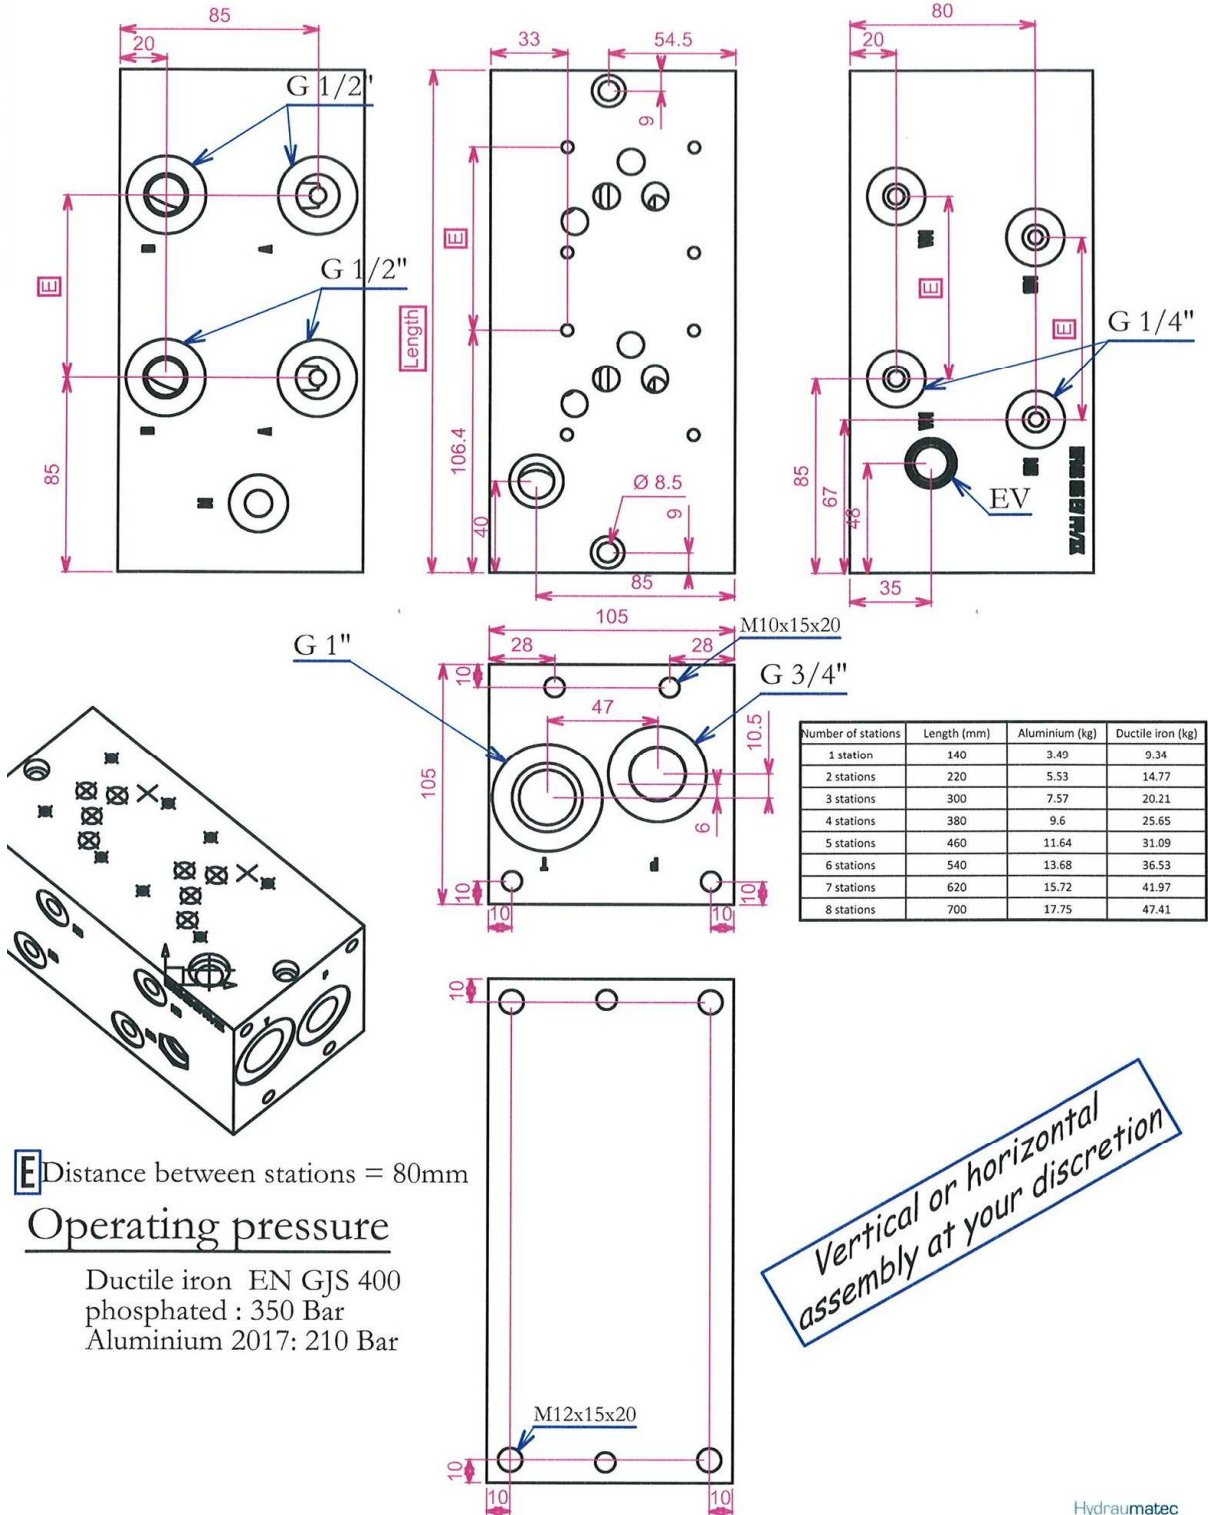

Number of stations	Length (mm)	Aluminium (kg)	Ductile iron (kg)
1 station	140	3.49	9.34
2 stations	220	5.53	14.77
3 stations	300	7.57	20.21
4 stations	380	9.6	25.65
5 stations	460	11.64	31.09
6 stations	540	13.68	36.53
7 stations	620	15.72	41.97
8 stations	700	17.75	47.41

**E** Distance between stations = 80mm

### Operating pressure

Ductile iron EN GJS 400  
 phosphated : 350 Bar  
 Aluminium 2017: 210 Bar

Vertical or horizontal assembly at your discretion

